



- for switching the external medium voltage lines to the values of rated power
- in compliance with: EN 60 265-1
- disconnectors are weather resistant and the functionality is guaranteed for up to 20mm of ice accretion.
- UJC-Ž - switch disconnector
- UJC-Ž-U - switch disconnector with grounding switch

TECHNICAL DATA

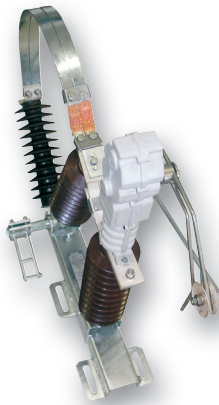

Rated voltage	25 kV, 38,5 kV
Rated current	400 A, 630 A, 1000 A
Rated dynamic current	40 kA
Rated short term current 1 s	16 kA
Capacitive release current	10 A
Release current of a non-loaded transformer	10 A
Maximum current induced at make	10 kA
Rated release current	400 A, 630 A, 1000 A
Mechanical durability	3000 ON/OFF cycles
Durability	30 years
Weight	32, 40 kg

Switch disconnector OJC - Ž 38,5/400 - 10

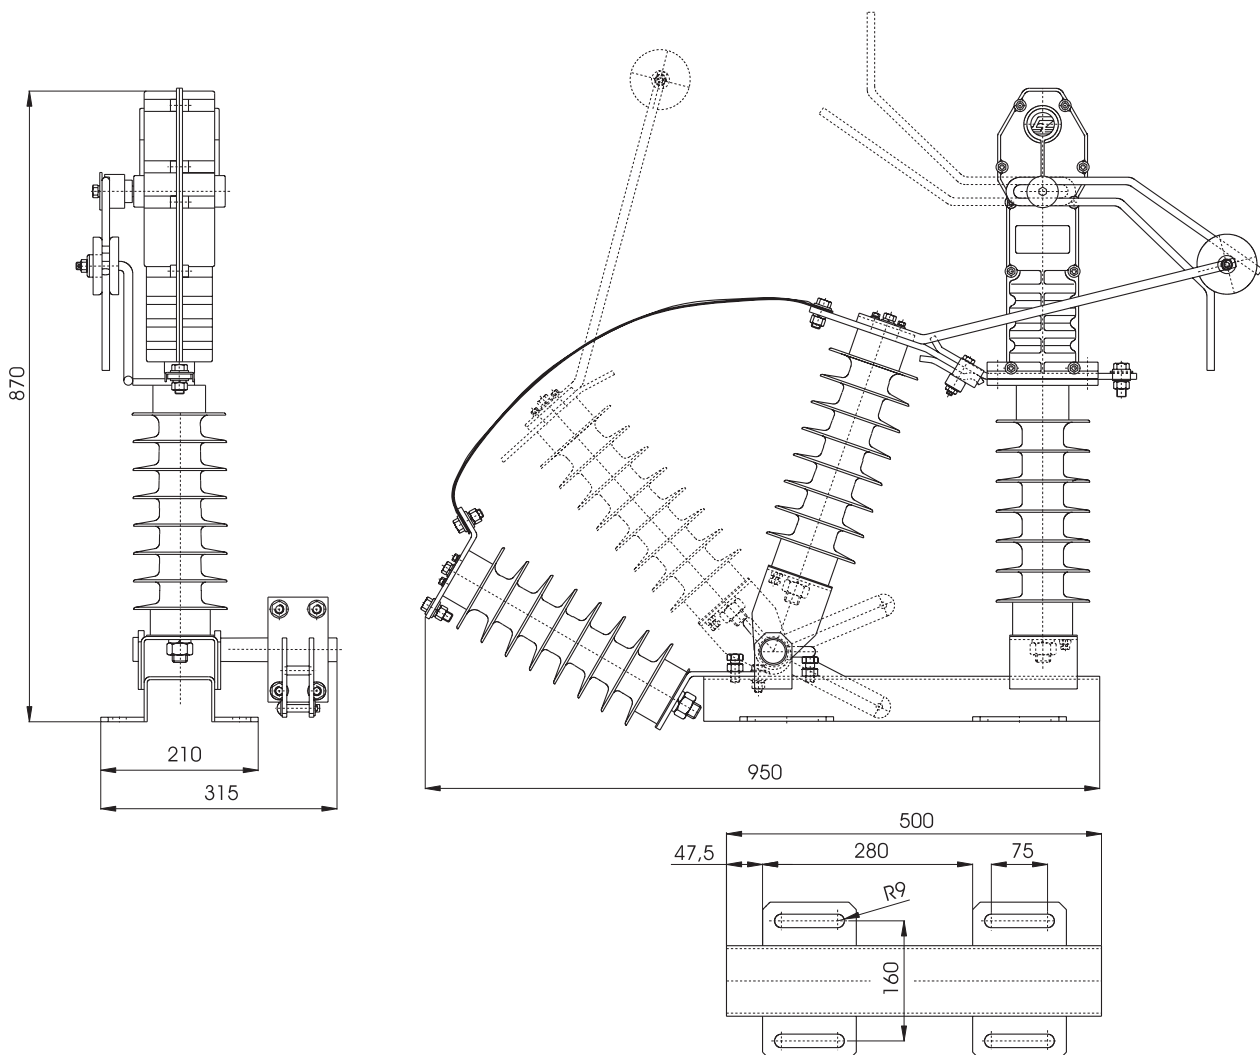

Switch disconnector OJC - Ž - U

